


# alimentatori per led a corrente costante IP20

## constant current led power supplies IP20

<b>sezione minima cavo uscita alimentatori corrente costante</b>		
<b>minimum section output cable constant current power supply</b>		
I (mA)	sez. min cavo min. sect. cable	Lmax Lmax (mt)
350	2 x 0,5 mm <sup>2</sup>	20
	2 x 0,75 mm <sup>2</sup>	40
500	2 x 0,5 mm <sup>2</sup>	15
	2 x 0,75 mm <sup>2</sup>	30
700	2 x 0,5 mm <sup>2</sup>	10
	2 x 0,75 mm <sup>2</sup>	20
1400	2 x 0,75 mm <sup>2</sup>	10
	2 x 1,5 mm <sup>2</sup>	20



240V 50-60Hz

ECG



IP20



CE



**T4.341**

alimentatore led corrente costante 500mA  
constant current led power supply 500mA

10W


0,05

nr. led 1-4 - morsettiera

protezione da sovratemperatura - protezione da cortocircuito

led n. 1-4 - terminal block

over-temperature protection - short circuit protection

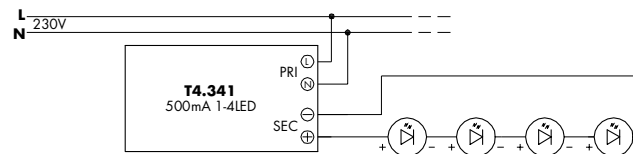

## legenda



standard di sicurezza europei, european safety standards



trasformatore di sicurezza resistente al cortocircuito  
safety isolating short-circuit proof transformer



lampada a scarica, discharge lamp



led monocromatico, monochrome led



led rgb, rgb led



lampada a incandescenza o alogena, incandescent or halogen lamp



pulsante normalmente aperto, push button normally open



potenziometro 1-10V, potentiometer 1-10V



fusibile ritardato, delayed fuse