

alimentatori per led a corrente costante IP67

constant current led power supplies IP67

sezione minima cavo uscita alimentatori corrente costante		
minimum section output cable constant current power supply		
I (mA)	sez. min cavo min. sect. cable	Lmax Lmax (mt)
350	2 x 0,5 mm ²	20
	2 x 0,75 mm ²	40
500	2 x 0,5 mm ²	15
	2 x 0,75 mm ²	30
700	2 x 0,5 mm ²	10
	2 x 0,75 mm ²	20
1400	2 x 0,75 mm ²	10
	2 x 1,5 mm ²	20


240V 50-60Hz

ECG

IP67


CE

i



T4.412 alimentatore led corrente costante 500mA 18W 0,05
constant current led power supply 500mA

nr. led 1-10 - cavi 1,0,5m con connettore M8 IP67 -
protezione da sovratemperatura - protezione da cortocircuito
led n. 1-10 - cables 1,0,5m with M8 IP67 connector
over-temperature protection - short circuit protection

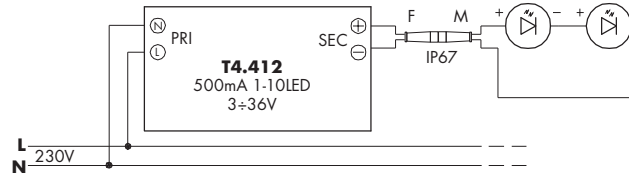

standard di sicurezza europei, european safety standards



trasformatore di sicurezza resistente al cortocircuito
safety isolating short-circuit proof transformer



lampada a scarica, discharge lamp



led monocromatico, monochrome led



led rgb, rgb led



lampada a incandescenza o alogena, incandescent or halogen lamp



pulsante normalmente aperto, push button normally open



potenziometro 1-10V, potentiometer 1-10V



fusibile ritardato, delayed fuse